

## TeleControl Serie 21 , 2 Botones , 1 Velocidad, Alcance 100Mts 18 a 65V AC DC

### Características Esenciales

- 1 Años de Garantía, Partes y Servicios Disponibles en América




## Especificaciones Técnicas

|  |                       |  |                                      |
|--|-----------------------|--|--------------------------------------|
| <b>Codigo FCC</b>                            | OFNF21                | <b>Rango de Frecuencia</b>             | VHF: 310~331 MHz; UHF: 425 ~ 446 MHz |
| <b>Fuente de Alimentación del Transmisor</b> | 2 AA batteries        | <b>Parada de Emergencia</b>            | No                                   |
| <b>Material</b>                              | Glass-Fiber PA        | <b>Rango de temperatura de Trabajo</b> | -40 ~ 185 °F / -40 ~ 85°C            |
| <b>Distancia de Control</b>                  | Up to 180 ft          | <b>Normas</b>                          | FCC and OSHA standard 1910.179       |
| <b>Código de Seguridad</b>                   | 32 bits (4.3 billion) | <b>Garantía</b>                        | 1 Year                               |
| <b>Potencia del Transmisor</b>               | ≤10dBm                |  |                                      |

### F21-2S/2D TRANSMITTER

Small, economical, convenient

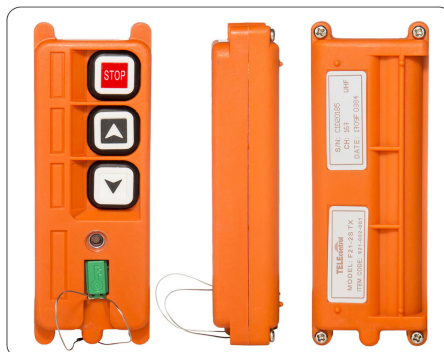

**MODEL:** F21-2S-TX  
**ITEM CODE:** 921-002-001  
**Dimensions:** 132 x 45 x 28 mm  
**Weight:** 98g (without batteries)

**Product Features:**

- Two single/double speed buttons, one "STOP"
- 6 control contactors.
- With battery voltage warning device, the power supply is cut off during low power
- Safety key switch to prevent from unauthorized user.
- Program the button function by computer interface.
- Up/Down can be programmed to interlock or non-interlock.
- The spare button can be programmed to start, toggle or normal, etc.

**Transmitter Parameters: F21-2S**

|                            |                                       |
|----------------------------|---------------------------------------|
| Material                   | Glass-Fiber PA                        |
| Enclosure protection class | IP65                                  |
| Frequency range            | VHF: 310~331MHz; UHF: 425~446MHz      |
| Transmitter power          | < 10dBm                               |
| Transmitter power supply   | 2 AA batteries                        |
| Safety code                | 32 bits (4.3 billion)                 |
| Temperature range          | -40° C ~+ 85° C                       |
| Control distance           | Approx 60m (100 meters is customized) |

**Standard Configuration:**

- One transmitter (with hanging belt)
- One dust bag
- One receiver
- Receiver with 1.6 meter cable
- Battery: One pair
- One receiver antenna.
- Operation and maintenance manual.

**Safety features:**

Each radio remote control system functions in all manner of operational conditions equipped with their own unique identity code (ID-Code). This means that only the correct control unit can activate and control its matching receiver (crane/machine) for maximum safety. The system is FCC and CE certificated.



### F21-2S/2D RECEIVER

**MODEL:** F21-2SRXC  
**ITEM CODE:** 921-103-011  
**Dimensions:** 88 x 92 x 62 mm  
**Weight:** 320g



**Transmitter Parameters: F21-RXC**

|                            |  |
|----------------------------|--|
| Material                   | Glass-Fiber PA   |
| Enclosure protection class | IP65   |
| Frequency range            | VHF: 310~331MHz; UHF: 425~446MHz                           |
| Receiver sensitivity       | -110dBm  |
| Receiver power supply      | 18~65V AC/DC, 65~440V AC/DC (optional)                     |
| Output contactor capacity  | 8A sealed relay output (with AC 250V/10A relays, 10A fuse) |
| Control distance           | Approx 60m (100 meters is customized)                      |
| Safety code                | 32 bits (4.3 billion)                                      |
| Temperature range          | -40° C ~+ 85° C  |



## Peso & Dimensiones

**Peso Total** 1 lbs / 1 Kg

## Detalles del Empaque

**Paquete 1 Peso Neto** 1 lbs / 0 Kg

**Paquete 1 Ancho** 7 in / 17.78 cm

**Paquete 1 Peso Bruto** 1 lbs / 0 Kg

**Paquete 1 Altura** 9 in / 22.86 cm

**Paquete 1 Profundidad** 3 in / 7.62 cm

Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso