



## F21 Transmisor (solo) Velocidad Simple


### Características Esenciales

- 1 Años de Garantía, Partes y Servicios Disponibles en América

## Especificaciones Técnicas

<b>Codigo FCC</b>	OFNF21	<b>Rango de Frecuencia</b>	VHF: 310~331 MHz; UHF: 425 ~ 446 MHz
<b>Fuente de Alimentación del Transmisor</b>	2 AA batteries	<b>Parada de Emergencia</b>	No
<b>Material</b>	Glass-Fiber PA	<b>Rango de temperatura de Trabajo</b>	-40 ~ 185 °F / -40 ~ 85°C
<b>Distancia de Control</b>	Up to 180 ft	<b>Normas</b>	FCC and OSHA standard 1910.179
<b>Código de Seguridad</b>	32 bits (4.3 billion)	<b>Garantía</b>	1 Year
<b>Potencia del Transmisor</b>	≤10dBm		

**F21-2S/2D TRANSMITTER**  
Small, economical, convenient

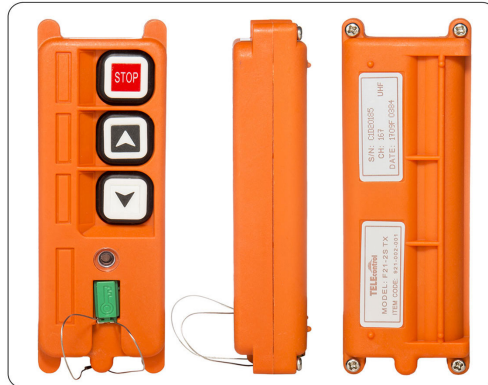

**MODEL:** F21-2S-TX  
**ITEM CODE:** 921-002-001  
**Dimensions:** 132 x 45 x 28 mm  
**Weight:** 98g (without batteries)

**Product Features:**

- Two single/double speed buttons, one "STOP"
- 6 control contactors.
- With battery voltage warning device, the power supply is cut off during low power
- Safety key switch to prevent from unauthorized user.
- Program the button function by computer interface.
- Up/Down can be programmed to interlock or non-interlock.
- The spare button can be programmed to start, toggle or normal, etc.

**Standard Configuration:**

- One transmitter (with hanging belt)
- One dust bag
- One receiver
- Receiver with 1.6 meter cable
- Battery: One pair
- One receiver antenna.
- Operation and maintenance manual.

**Safety features:**

Each radio remote control system functions in all manner of operational conditions equipped with their own unique identity code (ID-Code). This means that only the correct control unit can activate and control its matching receiver (crane/machine) for maximum safety. The system is FCC and CE certicates.



**Peso & Dimensiones**

**Peso Total** 1 lbs / 1 Kg

**Detalles del Empaque**

**Paquete 1 Peso Neto** 1 lbs / 0 Kg

**Paquete 1 Ancho** 4 in / 10.16 cm

**Paquete 1 Peso Bruto** 1 lbs / 0 Kg

**Paquete 1 Altura** 4 in / 10.16 cm

**Paquete 1 Profundidad** 9 in / 22.86 cm

Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso