




## **Optidrive P2 VFD 50 HP, 72 A, 380~480 V, 3PH with EMC Filter and TFT D**

Input Ratings Supply Voltage 380-480 V Input Phases 3 Supply Current Continuous 76.4 A Supply Fuse or MCB (Type B) 100 A Output Ratings Motor Output Rating 37 kW (50 HP) Output Voltage 0 - Supply Voltage Output Current 72 A Cable Information Max Supply Cable Size 35 mm<sup>2</sup> (0.05 sq in) Max Motor Cable Size 35 mm<sup>2</sup> (0.05 sq in) Max Motor Cable Length 100 m (328 ft) Factory Build Options EMC Filter Internal EMC Brake Transistor Internal Enclosure IP20 Display TFT Display PCB Coating Standard

## Especificaciones Técnicas

|   |             |   |            |
|---|-------------|---|------------|
| <b>Fases de entrada</b>                   | 3           | <b>Corriente de Salida</b>                    | 72 A       |
| <b>Voltaje de Suministro</b>              | 380 - 480 V | <b>Diametro Maximo de cable de suministro</b> | 0.05 sq in |
| <b>Corriente de Suministro</b>            | 76.4VDC     | <b>Diametro maximo del cable del motor</b>    | 0.05 sq in |
| <b>Fusible de suministro o MCB</b>        | Type B 100A | <b>Largo maximo del cable del motor</b>       | 328 ft     |
| <b>Clasificacion de voltaje de salida</b> | 37kW        |   |            |

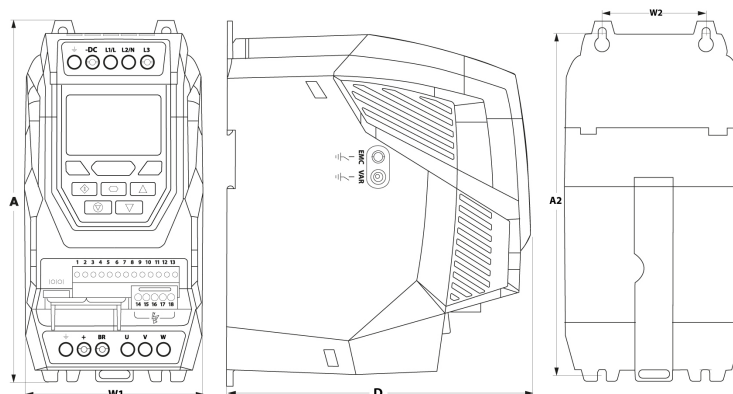

## Peso & Dimensiones

**Peso Total** 45 lbs / 21 Kg

## Detalles del Empaque

**Paquete 1 Peso Neto** 3.97 lbs / 2 Kg

**Paquete 1 Ancho** 14 in / 35.56 cm

**Paquete 1 Peso Bruto** 45 lbs / 20 Kg

**Paquete 1 Altura** 14 in / 35.56 cm

**Paquete 1 Profundidad** 26 in / 66.04 cm