



Grua Marina Articulada Hidraulica 1.1 Tons

Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América


Copyright: The pictures contained in this site belong to Prowinch LLC and are protected by copyright under national and international law. This information may not be reproduced, adapted or modified without the written consent of Prowinch LLC. The use of these images and texts implies that you should mention Prowinch LLC as owner. By consulting this site or downloading any information you agree to these conditions.

Especificaciones Técnicas


| | | | |
|----------|--------|--|--|
| Garantía | 3 Year | | |
|----------|--------|--|--|

| | |
|---|---------------------------------|
| Safe Working Load | 0.2 T / 12.5 m |
| Carga Trabajo Seguro | |
| Max. Working Radius | 12.5m |
| Máx. Radio de trabajo | |
| Min. Working Radius | 3.6m |
| Min. Radio de trabajo | |
| Hoisting speed full load | 0 ~10 m/min |
| Velocidad de izaje plena Carga | |
| Hoisting height | 20m |
| Altura de izaje | |
| Slewing speed | 1 rev/min |
| Velocidad de giro | |
| Slewing angle | 360° |
| Angulo de giro | |
| First luffing time | ~50s |
| Primer tiempo de Levante Pluma | |
| Second luffing time | ~50s |
| Segundo tiempo de Levante Pluma | |
| Boom extension time | ~100s |
| Tiempo de extensión de la pluma | |
| Trim / Pie Longitudinal | ≤2° |
| Heel / Pie Transversal | ≤5° |
| Working Conditions / Condiciones de trabajo | Oil flow / Flujo aceite 30L/min |
| Temperature / Temperatura | -10° ~ +45° C |


| Position / Posición | Range / Alcance | Capacity / Capacidad |
|---------------------|-----------------|----------------------|
| 1 | 3.5 m | 1100 kg |
| 2 | 5 m | 750 kg |
| 3 | 7 m | 500 kg |
| 4 | 9 m | 360 kg |
| 5 | 11 m | 250 kg |
| 6 | 12.5 m | 200 kg |

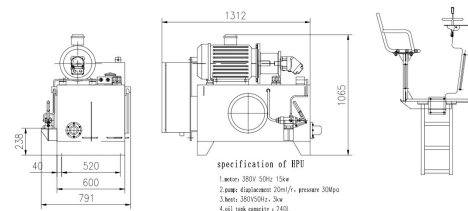

specification of RPE
 1. wire: 3000 5000 1000
 2. rope: 41000000 20000 30000
 3. motor: 380V 50Hz ~ 3kw
 4. oil: 30L/min capacity ~ 240L

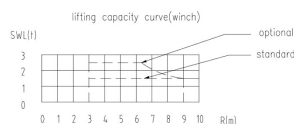

NOTE: Wireless remote control is optional.

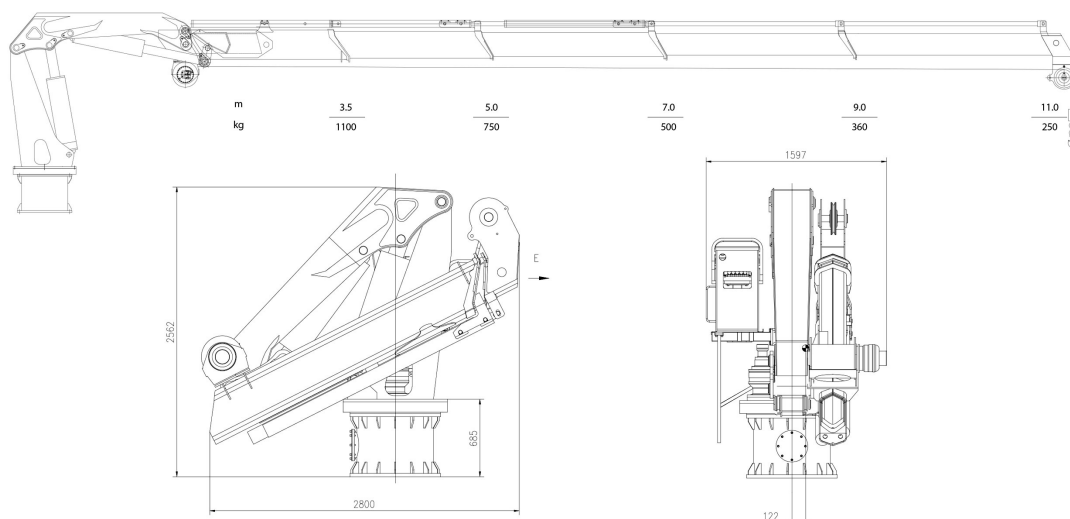

Referential Images / Imágenes Referenciales
 Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso