




1/4 ton Electric Chain Hoist w/ Power Trolley 1 Speed 208~240V / 440~480V 3ø 60HZ 13ft G100 Nickel Duty H4/M5

Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América

Especificaciones Técnicas

Optional Load Chain Brand & Country of Origin	FEC Japan	Velocidad /min	37.79 ft @60Hz 9.6 mt @50Hz
Standards Certified	CE	Numero de Velocidades	1 Speed
Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 15A at 220V and 10A at 460V	Voltaje	3 Phase 208~240/440~480V 50/60Hz
Power Cord Length and Phase Order	3 ft / Black L1 , Red L2 and Blue L3 Green ground	Potencia Total Watts	750
Pendant Control Yes No	Yes	Clase de Servicio	H4/M5/2m/Class D
Pendant Control Emergency Stop	Yes	Protección IEC Motor	IP55
Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	Control	Pendant Control IP66 and Optional Wireless
Overload Protection	Overload Motor Clutch	Voltaje del Control	48V
Trolley Beam Extension Kit	up to 12"	Parada de Emergencia	Yes
Brake SKU	PWRX-0.25-0.5-PN.4.11	Hoist Contactor Brand	Schneider
Trolley Wheel Material	No. 45 steel	Tipo Transmisión / Reductor	Spur gearbox
Trolley Wheel Diameter	95	Tipo de Cadena	G100 Nikel
Trolley UL Component	UL Listed	Dimensiones de la Cadena	5mm
Trolley Motor Insulation Grade	F	Caidas de Cadena	1
Trolley Motor Brake Type and DC Voltage	DC99V/DC207V	Longitud de cadena	13
Trolley Minimum Turn Radius	1.3	Humedad	20%~90%
Trolley Contactors Coil Voltage	48V	Temperatura	-4 ~ 104° F / -20 ~ 40° C
Trolley Contactors Brand	Schneider	Potencia del Trolley	250
Trolley Contactors Amps	20A	Velocidad del Trolley /min	43.30 ft @60Hz 11 mt @50Hz
Trolley Beam Range	3" to 5"	Cantidad de Velocidades	1
Brake rectifiers-half-wave	PWRX-BKTF-HW	Normas	ASME HST-1 , ASME B30.16 , EN60204-36
Capacidad de Carga	1/4 ton	Garantía	3 Year
Altura de Izaje Estandard (Customizable)	13 ft / 4 m		

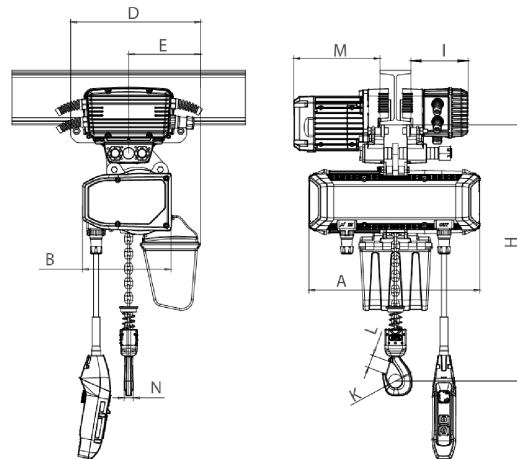

Rated load (t)	Type	Dimension (mm)									
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K
0.25-0.5	PWRXT0.25-0.5-VS	473	447	3500-5500	217	334	152	147	220	20	35

Peso & Dimensiones

H Altura Muerta	385
W Ancho	305
A Altura Total	385
J Boca Gancho	35
D Depth	440
Peso Total (sin cable o cadena)	56
Peso Total	145.2 lbs / 66 Kg

Detalles del Empaque

Paquete 1 Peso Neto	61.16 lbs / 28 Kg
Paquete 2 Peso Neto	62.48 lbs / 28 Kg
Paquete 1 Peso Bruto	74.8 lbs / 34 Kg
Paquete 2 Peso Bruto	70.4 lbs / 32 Kg
Paquete 1 Profundidad	20 in / 50.8 cm
Paquete 2 Profundidad	8 in / 20.32 cm
Paquete 1 Ancho	15 in / 38.1 cm
Paquete 2 Ancho	13 in / 33.02 cm
Paquete 1 Altura	20 in / 50.8 cm
Paquete 2 Altura	20 in / 50.8 cm