




## **1/2 ton Electric Chain Hoist w/ Power Trolley 1 Speed 208~240V / 440~480V 3ø 60HZ 13ft G100 Nickel Duty H4/M5**

### **Características Esenciales**

- 3 Años de Garantía, Partes y Servicios Disponibles en América

## Especificaciones Técnicas

<b>Optional Load Chain Brand &amp; Country of Origin</b>	FEC Japan	<b>Velocidad /min</b>	31.49 ft @60Hz 8 mt @50Hz
<b>Standards Certified</b>	CE	<b>Numero de Velocidades</b>	1 Speed
<b>Recommended Hoist Protection Circuit Breaker AMPs and Type</b>	Type D 15A at 220V and 10A at 460V	<b>Voltaje</b>	3 Phase 208~240/440~480V 50/60Hz
<b>Power Cord Length and Phase Order</b>	3 ft / Black L1 , Red L2 and Blue L3 Green ground	<b>Potencia Total Watts</b>	1000
<b>Pendant Control Yes No</b>	Yes	<b>Clase de Servicio</b>	H4/M5/2m/Class D
<b>Pendant Control Emergency Stop</b>	Yes	<b>Protección IEC Motor</b>	IP55
<b>Paint Specifications</b>	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	<b>Control</b>	Pendant Control IP66 and Optional Wireless Pendant Control IP66 and Optional Wireless
<b>Overload Protection</b>	Overload Motor Clutch	<b>Voltaje del Control</b>	48V
<b>Trolley Beam Extension Kit</b>	up to 12"	<b>Parada de Emergencia</b>	Yes
<b>Brake SKU</b>	PWRX-0.25-0.5-PN.4.11	<b>Hoist Contactor Brand</b>	Schneider
<b>Trolley Wheel Material</b>	No. 45 steel	<b>Tipo Transmisión / Reductor</b>	Spur gearbox
<b>Trolley Wheel Diameter</b>	95	<b>Tipo de Cadena</b>	G100 Nikel
<b>Trolley UL Component</b>	UL Listed	<b>Dimensiones de la Cadena</b>	6.3mm
<b>Trolley Motor Insulation Grade</b>	F	<b>Caidas de Cadena</b>	1
<b>Trolley Motor Brake Type and DC Voltage</b>	DC99V/DC207V	<b>Longitud de cadena</b>	13
<b>Trolley Minimum Turn Radius</b>	1.3	<b>Humedad</b>	20%~90%
<b>Trolley Contactors Coil Voltage</b>	48V	<b>Temperatura</b>	-4 ~ 104° F / -20 ~ 40° C
<b>Trolley Contactors Brand</b>	Schneider	<b>Potencia del Trolley</b>	500
<b>Trolley Contactors Amps</b>	20A	<b>Velocidad del Trolley /min</b>	43.30 ft @60Hz 11 mt @50Hz
<b>Trolley Beam Range</b>	3" to 5"	<b>Cantidad de Velocidades</b>	1
<b>Brake rectifiers-half-wave</b>	PWRX-BKTF-HW	<b>Normas</b>	ASME HST-1 , ASME B30.16 , EN60204-37
<b>Capacidad de Carga</b>	1/2 ton	<b>Garantía</b>	3 Year
<b>Altura de Izaje Estandard (Customizable)</b>	13 ft / 4 m		

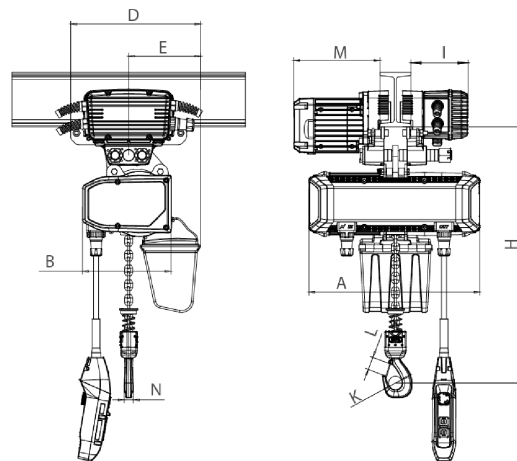

Rated load (t)	Type	Dimension (mm)									
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K
0.25-0.5	PWRXT0.25-0.5-VS	473	447	3500-5500	217	334	152	147	220	20	35

## Peso & Dimensiones

<b>H Altura Muerta</b>	396
<b>W Ancho</b>	305
<b>A Altura Total</b>	396
<b>J Boca Gancho</b>	35
<b>D Depth</b>	440
<b>Peso Total (sin cable o cadena)</b>	53
<b>Peso Total</b>	145.2 lbs / 66 Kg

## Detalles del Empaque

<b>Paquete 1 Peso Neto</b>	61.16 lbs / 28 Kg
<b>Paquete 2 Peso Neto</b>	62.48 lbs / 28 Kg
<b>Paquete 1 Peso Bruto</b>	74.8 lbs / 34 Kg
<b>Paquete 2 Peso Bruto</b>	70.4 lbs / 32 Kg
<b>Paquete 1 Profundidad</b>	20 in / 50.8 cm
<b>Paquete 2 Profundidad</b>	8 in / 20.32 cm
<b>Paquete 1 Ancho</b>	15 in / 38.1 cm
<b>Paquete 2 Ancho</b>	13 in / 33.02 cm
<b>Paquete 1 Altura</b>	20 in / 50.8 cm
<b>Paquete 2 Altura</b>	20 in / 50.8 cm