



1 ton Electric Chain Hoist w/ Power Trolley 2 Speed 208~240V / 440~480V 3ph 60HZ


Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América

1 ton Electric Chain Hoist w/ Power Trolley 2 Speed 208~240V / 440~480V 3ø 60HZ 20ft G100 Nickel Duty H4/M5

Especificaciones Técnicas

Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 20A at 220V and 15A at 460V	Numero de Velocidades	2 Speed
Power Cord Length and Phase Order	3 ft / Black L1 , Red L2 and Blue L3[]Green ground	Voltaje	3 Phase 208~240/440~480V 50/60Hz
Pendant Control Yes No	Yes	Potencia Total Watts	2000
Pendant Control Emergency Stop	Yes	Clase de Servicio	H4/M5/2m/Class D
Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	Protección IEC Motor	IP55
Overload Protection	Overload Motor Clutch	Control	Pendant Control IP66 and Optional Wireless
Optional Load Chain Brand & Country of Origin	FEC Japan	Voltaje del Control	24V
Standards Certified	CE	Parada de Emergencia	Yes
Brake SKU	PWRX-1-PN.60.61	Tipo Transmisión / Reductor	Spur gearbox
Trolley Wheel Material	No. 45 steel	Tipo de Cadena	G100 Nikel
Trolley Wheel Diameter	95	Dimensiones de la Cadena	7.1 mm
Trolley Motor Insulation Grade	F	Caidas de Cadena	1
Brake rectifiers-half-wave	PWRX-BKTF-HW	Longitud de cadena	20
Trolley Motor Brake Type and DC Voltage	DC99V/DC207V	Humedad	20%~90%
Trolley Minimum Turn Radius	1.3	Temperatura	-4 ~ 104° F / -20 ~ 40° C
Trolley Contactors Coil Voltage	24 V	Potencia del Trolley	500
Trolley Contactors Brand	Schneider	Velocidad del Trolley /min	14.17~43.30 ft @60Hz 3.6~11 mt @50Hz
Trolley Contactors Amps	32A	Cantidad de Velocidades	2
Trolley Beam Range	2" to 6"	Rango de ancho de la Viga	2" to 6"
Trolley Beam Extension Kit	up to 12"	Radio Minimo de Giro	1.3
Capacidad de Carga	1 ton	Normas	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-33
Altura de Izaje Estandard (Customizable)	20 ft / 6 m	Garantía	3 Year
Velocidad /min	7.9/ 42.7 ft @60Hz 2/6.5 mt @50Hz		

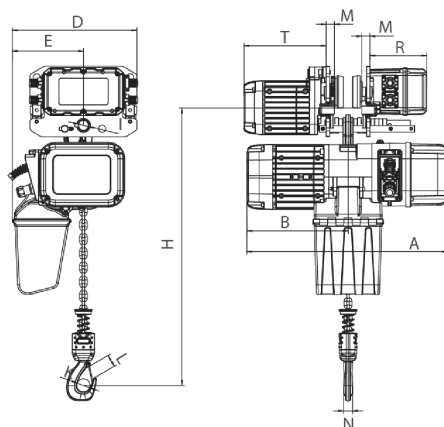

Rated load (t)	Type	Dimension (mm)												
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R
1	PWRXT1-01	473	440	3500-5500	285	210	20	105	140					
2	PWRXT2-01	516	590		276	368	210	31	24	25	42	32	242	167
3	PWRXT3-01	600	681		350	422	264	36	28	35	52	42	242	167
5	PWRXT5-02	645	681		350	478	307	43	30	34	59	48	242	167

Peso & Dimensiones

H Altura Muerta	516
W Ancho	368
A Altura Total	516
J Boca Gancho	42
D Depth	590
Peso Total (sin cable o cadena)	86
Peso Total	330 lbs / 150 Kg

Detalles del Empaque

Paquete 1 Peso Neto	101.64 lbs / 46 Kg
Paquete 2 Peso Neto	111.1 lbs / 50 Kg
Paquete 1 Peso Bruto	209 lbs / 95 Kg
Paquete 2 Peso Bruto	121 lbs / 55 Kg
Paquete 1 Profundidad	26 in / 66.04 cm
Paquete 2 Profundidad	11 in / 27.94 cm
Paquete 1 Ancho	16 in / 40.64 cm
Paquete 2 Ancho	14 in / 35.56 cm
Paquete 1 Altura	26 in / 66.04 cm
Paquete 2 Altura	23 in / 58.42 cm

