




**20 ton Electric Chain Hoist w/  
Power Trolley Variable Speed  
Trolley 208~240V / 440~480V  
3Å, 60HZ**

## Especificaciones Técnicas

Capacidad de Carga	20 ton	Load Chain weight per foot [lbs]	1.83
Voltaje	3 Phase 208~240/440~480V 50/60Hz	Humedad	20%~90%
Altura de Izaje Estandar (Customizable)	40 ft / 12 m	Temperatura	-4 ~ 104° F / -20 ~ 40° C
Velocidad /min	5.31 ft @60Hz 1.35 mt @50Hz	Tipo Transmisión / Reductor	Spur gearbox
Numero de Velocidades	1 Speed	Reducer Lubrication Type	Oil
Hoist Contactors Amps	25A	Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments
Hoist Contactor Brand	Schneider	Normas	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-39
Hoist Contactor Coil Voltage	24 V	Standards Certified	CE
Clase de Servicio	H4/M5/2m/Class D	Potencia del Trolley	750+750
IEC Hoist IP Protection	IP55	Cantidad de Velocidades	Variable
Protección IEC Motor	IP55	Velocidad del Trolley /min	2.75~27.55 ft @60Hz 0.7~7 mt @50Hz
Pendant Control Yes No	Yes	Trolley Motor Brake Type and DC Voltage	DC99V/DC207V
IEC Pendant Control Protection	IP66	Trolley Motor Insulation Grade	F
Pendant Control Emergency Stop	Yes	Trolley VFD Power in KW	2.5kW
Pendant Control total Length	37 ft	Trolley VFD Brand	z-230
Hoist Motor Power in KW	3+3	Trolley VFD Model	huayuan
Hoist Motor Brake Type and DC Voltage	DC99V/DC207V	Trolley Wheel Diameter	139
Hoist Motor Insulation Grade	F	Trolley Wheel Material	No. 45 steel
Potencia Total Watts	7500	Trolley Minimum Turn Radius	2.2
Power Cord Length and Phase Order	3 ft / Black L1 , Red L2 and Blue L3 □Green ground	Trolley Beam Range	5.9" to 8.6"
Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 50A at 220V and 30A at 460V	Trolley Beam Extension Kit	up to 12"
Optional Load Chain Brand & Country of Origin	FEC Japan	Overload Protection	Overload Motor Clutch
Tipo de Cadena	G100 Nikel	Hour Meter	Internal Working Hour Meter
Dimensiones de la Cadena	11.2 mm	Brake SKU	PWRX-2-20-PN.60.61
Caidas de Cadena	8	Brake rectifiers-half-wave	PWRX-BKTF-HW
Longitud de cadena	320	Brake rectifiers-full-wave	PWRX-BKTF-FW

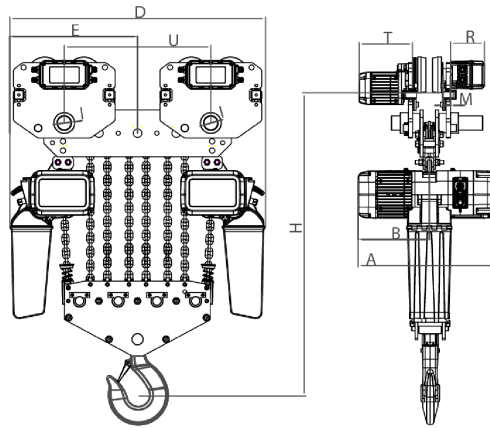

Rated load (t)	Type	Dimension (mm)												
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R
20	PWRXT20-08	1300	700	3500-5500	350	1246	623	71	40	80	120	96	242	167

## Peso & Dimensiones

<b>A Altura Total</b>	1300
<b>J Boca Gancho</b>	120
<b>W Ancho</b>	1246
<b>H Altura Muerta</b>	1240
<b>D Depth</b>	700
<b>1st Package Type</b>	Wood Crate
<b>Peso Total (sin cable o cadena)</b>	845
<b>2nd Package Type</b>	Wood Crate
<b>Peso Total</b>	1848 lbs / 839 Kg

## Detalles del Empaque

<b>Paquete 1 Altura</b>	51 in / 129.54 cm
<b>Paquete 2 Altura</b>	23 in / 58.42 cm
<b>Paquete 1 Ancho</b>	30 in / 76.2 cm
<b>Paquete 2 Ancho</b>	14 in / 35.56 cm
<b>Paquete 1 Profundidad</b>	55 in / 139.7 cm
<b>Paquete 2 Profundidad</b>	11 in / 27.94 cm
<b>Paquete 1 Peso Neto</b>	1430 lbs / 649 Kg
<b>Paquete 2 Peso Neto</b>	345.4 lbs / 157 Kg
<b>Paquete 1 Peso Bruto</b>	1474 lbs / 669 Kg
<b>Paquete 2 Peso Bruto</b>	374 lbs / 170 Kg

Referential Images / Imágenes Referenciales  
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso