



Polipasto Cadena 3 Ton - 9 metros de Izaje - con Proteccion de Sobrecarga y cadena G100

Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América

Prowinch Manual Chain Hoist

All of our **Manual Chain Hoists** are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.

Overload Protection System

The built-in **overload protection system** helps prevent the operator from accidentally damaging the hoist by lifting a load higher than the rated capacity. When the overload protection is activated while lifting, the hoist will only be able to be lowered by the operator.


Braking System

The reliable disc brake system is tested at 125% of the hoist capacity.

Especificaciones Técnicas

Capacidad de Carga	6610 lb / 3000 kg	Caidas de Cadena	1
Altura de Izaje Estandar (Customizable)	20 ft / 6 m	Normas	ANSI/ASME B30.16, EN13157, ISO 16877-2008
Tipo de Cadena	G100	Garantía	3 Year
Dimensiones de la Cadena	Thickness: 7.60 mm		

Model/Modelo	PWV1Tp	PWV2Tp	PWV3Tp	PWV5Tp	PWV10Tp	PWV20Tp
Dimensions	A 5.5 in / 140 mm	6.3 in / 161 mm		7.3 in / 186 mm	8.1 in / 207 mm	8.5 in / 215 mm
Dimensiones	B 6.2 in / 158 mm	7.4 in / 187 mm	7.8 in / 199 mm	10 in / 253 mm	15.7 in / 398 mm	25.6 in / 650 mm
	C 12.5 in / 317 mm	16.3 in / 414 mm	18.3 in / 465 mm	25 in / 636 mm	31.4 in / 798 mm	35 in / 890 mm

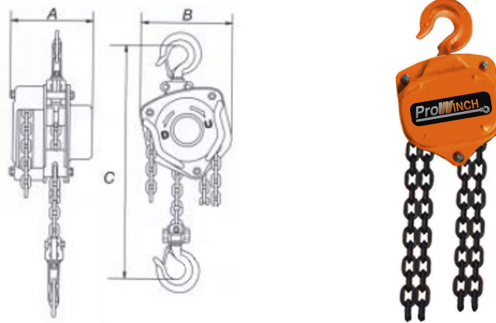

Peso & Dimensiones

Peso Total 96 lbs / 44 Kg

Detalles del Empaque

Paquete 1 Peso Bruto 96 lbs / 44 Kg

Paquete 1 Ancho 17 in / 43.18 cm

Paquete 1 Profundidad 14 in / 35.56 cm

Paquete 1 Altura 10 in / 25.4 cm

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso