



Polipasto Cadena 20 Ton 12 metros con Proteccion de Sobrecarga y cadena G100

Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América

Prowinch Manual Chain Hoist

All of our **Manual Chain Hoists** are created with the goal of offering the best price-performance ratio. Key components such as lifespan factors are constantly tested and improved in order to offer the best product for the price.

Overload Protection System

The built-in **overload protection system** helps prevent the operator from accidentally damaging the hoist by lifting a load higher than the rated capacity. When the overload protection is activated while lifting, the hoist will only be able to be lowered by the operator.


Braking System

The reliable disc brake system is tested at 125% of the hoist capacity.

Especificaciones Técnicas

Capacidad de Carga	44000 lb / 20000 kg	Caidas de Cadena	8
Altura de Izaje Estandar (Customizable)	40 ft / 12 m	Normas	ANSI/ASME B30.16, EN13157, ISO 16877-2008
Tipo de Cadena	G100	Garantía	3 Year
Dimensiones de la Cadena	Thickness: 10.16 mm		

Model/Modelo	PWV1Tp	PWV2Tp	PWV3Tp	PWV5Tp	PWV10Tp	PWV20Tp
Dimensions	A 5.5 in / 140 mm	6.3 in / 161 mm	7.3 in / 186 mm	8.1 in / 207 mm	8.5 in / 215 mm	
	B 6.2 in / 158 mm	7.4 in / 187 mm	7.8 in / 199 mm	10 in / 253 mm	15.7 in / 398 mm	25.6 in / 650 mm
Dimensiones	C 12.5 in / 317 mm	16.3 in / 414 mm	18.3 in / 465 mm	25 in / 636 mm	31.4 in / 798 mm	35 in / 890 mm

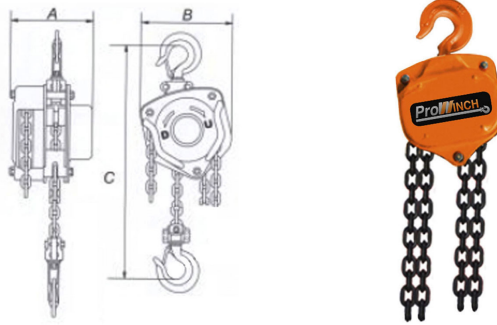

Peso & Dimensiones

A Altura Total	105 cm (min)	Paquete 1 Peso Neto	628 lbs / 285 Kg
W Ancho	67 cm	Paquete 1 Ancho	30 in / 76.2 cm
D Depth	20 cm	Paquete 1 Peso Bruto	663 lbs / 301 Kg
Peso Total	663 lbs / 301 Kg	Paquete 1 Altura	13 in / 33.02 cm
		Paquete 1 Profundidad	28 in / 71.12 cm

Detalles del Empaque

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso