



F21 Transmisor (solo) Velocidad Doble


Características Esenciales

- 1 Años de Garantía, Partes y Servicios Disponibles en América

Especificaciones Técnicas

Código FCC	OFNF21	Rango de Frecuencia	VHF: 310~331 MHz; UHF: 425 ~ 446 MHz
Fuente de Alimentación del Transmisor	2 AA batteries	Parada de Emergencia	No
Material	Glass-Fiber PA	Rango de temperatura de Trabajo	-40 ~ 185 °F / -40 ~ 85°C
Distancia de Control	Up to 180 ft	Normas	FCC and OSHA standard 1910.179
Código de Seguridad	32 bits (4.3 billion)	Garantía	1 Year
Potencia del Transmisor	≤10dBm		

F21-2S/2D TRANSMITTER
Small, economical, convenient

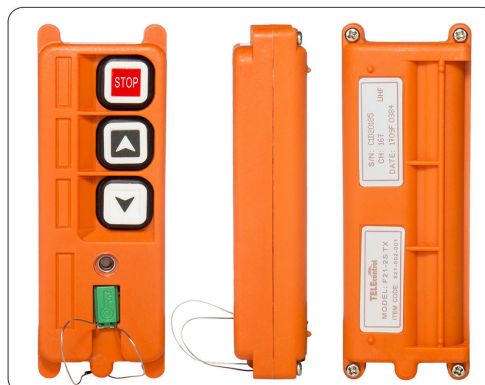

MODEL: F21-2S-TX
ITEM CODE: 921-002-001
Dimensions: 132 x 45 x 28 mm
Weight: 98g (without batteries)

Product Features:

- Two single/double speed buttons, one "STOP"
- 6 control contactors.
- With battery voltage warning device, the power supply is cut off during low power
- Safety key switch to prevent from unauthorized user.
- Program the button function by computer interface.
- Up/Down can be programmed to interlock or non-interlock.
- The spare button can be programmed to start, toggle or normal, etc.

Standard Configuration:

- One transmitter (with hanging belt)
- One dust bag
- One receiver
- Receiver with 1.6 meter cable
- Battery: One pair
- One receiver antenna.
- Operation and maintenance manual.

Safety features:

Each radio remote control system functions in all manner of operational conditions equipped with their own unique identity code (ID-Code). This means that only the correct control unit can activate and control its matching receiver (crane/machine) for maximum safety. The system is FCC and CE certicates.



Peso & Dimensiones

Peso Total 1 lbs / 1 Kg

Detalles del Empaque

Paquete 1 Peso Neto 1 lbs / 0 Kg

Paquete 1 Ancho 2 in / 5.08 cm

Paquete 1 Peso Bruto 1 lbs / 0 Kg

Paquete 1 Altura 5 in / 12.7 cm

Paquete 1 Profundidad 2 in / 5.08 cm

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso