



# Electric Chain Hoist 2,200 lbs. 20 ft. G80 Chain WIRELESS Stop Aluminum 120V

#### **Características Esenciales**


- High-efficiency Motor 750W 8A @ 110V. Speed 8 ft per min
- Duty Class: H2/M3/1Bm/Class B. Protection IP54
- Wired and Wireless Control. Heavy duty G80 Chain
- US and EU Standards ASME HST-1, ASME B30.16, IEC60204-32
- 3 Años de Garantía, Partes y Servicios Disponibles en América



## **Especificaciones Técnicas**


Others	IP54	Caidas de Cadena	2
Series	PWHF Series	Longitud de cadena	40 ft / 12 m
Capacidad de Carga	2200 lb / 1000 kg	Humedad	<85%
Altura de Izaje Estandard (Customizable)	20 ft / 6 m	Temperatura	-4 ~ 104° F / -20 ~ 40° C
Velocidad /min	8 ft / 2.5 m	Nivel de Ruido	70 dB
Numero de Velocidades	1 Speed	Normas	ASME HST-1 , ASME B30.16
Voltaje	1 Phase 110~120V 60Hz	Garantía	3 Year
Clase de Servicio	H2/M3/1Bm/Class B	Hoist Contactor Brand	TECO 12 AMP
Freno Motor	Yes	Pendant Control Yes No	included
Protección IEC Motor	IP54	IEC Pendant Control Protection	IP65
Control	Wireless F21-4 and Pendant Control	Pendant Control Emergency Stop	yes
Voltaje del Control	24V	Pendant Control total Length	15 ft
Tipo Transmisión / Reductor	Spur gearbox with Grease lubrication	Wireless Control Yes No	Yes
Tipo de Cadena	G80	1st Package Type	Wood Crate
Dimensiones de la Cadena	8x24 mm		



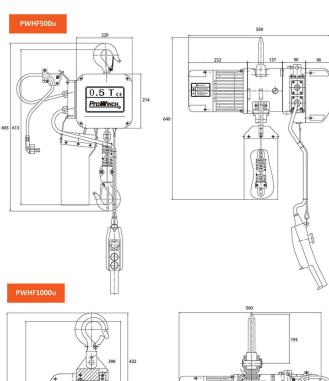

Light die-casting aluminium housing.
Electromagnetic Safe Brake holds load with no power.
Upper and lower limit switches prevent over-travel
14ft Pendant Control with Emergency Stop switch
Overload Protection
Forged 360° swivel hook

300



Carcasa de aluminio fundido a presion. Freno de Seguridad Electromagnetico que sostiene la carga sin energia. Interruptores de limite Superior e Inferior para prevenir sobrecarrera. Botonera de control con 4 metros e interruptor de parada de emergencia. Proteccion de sobre carga. Gancho Forjado de giro libre 360

#### **Peso & Dimensiones**

### **Detalles del Empaque**

Peso Total	171 lbs / 78 Kg	H Altura Muerta	31
		D Depth	12
		A Altura Total	34.05
		W Ancho	22

Referential Images / Imágenes Referenciales Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso