

Tecele Polipasto Prowinch c/carro electrico Monoviga 10 Tons trifasico







Características Esenciales

- Equipo de Doble Velocidad, Mono viga. Servicio Heavy Duty H4/M5.
- Dispositivos de Límite de alta precisión, Protección de Sobrecarga y Protección térmica
- Componentes de alta calidad, Motor SEW Eurodrive, VDF Schneider, contactores Eaton/Schneider
- Estándares US y EC ASME HST-1 , ASME B30.16 , ASME B30.17 , EN14492-2 , EN60204-32.
- 3 Años de Garantía, Partes y Servicios Disponibles en América

Especificaciones Técnicas

Capacidad de Carga	22000 lb / 10000 kg	Motor de Izaje	Sew Eurodrive DRS160M12/2
Altura de Izaje Estandar (Customizable)	40 ft / 12 m	Reductor de Izaje	Sew Eurodrive G97
Velocidad /min	2.62 - 15.4 ft/min / 0.8 - 4.8 m/min	Hoist Contactor Brand	Schneider or EATON
Numero de Velocidades	2 Speed	Tipo Transmisión / Reductor	Sew Eurodrive G97
Voltaje	3 Phase 208~240/440~480V 50/60Hz	Relación de Transmisión	152.74
Potencia Total Watts	1.5-9.5 kW	Cable	Ø 11 mm K19S IWRC 2160
Clase de Servicio	H4/M5/2m/Class D	Humedad	<85%
Tipo de Motor	Squirrel Cage Induction Motor	Temperatura	-4°~104° F / -20°~40° C
AMP Motor	22.3 A (@ 460v)	Reductor Carro	SEW Eurodrive RF27
RPM Motor	3420 / 552 rpm (@60hz)	Motor Carro	SEW Eurodrive DRN80M4
Freno Motor	Sew Eurodrive Electromagnetic Release Brake >125%	Potencia del Trolley	0.75 kw
Grado de Aislacion	F	Nivel de Ruido	82 dB
Protección IEC Motor	IP55	Velocidad del Trolley /min	16 ~ 65 ft/min. / 5 ~ 20 m/min
Protección Tablero de Control	IP65	Cantidad de Velocidades	2
Variador de Frecuencia	Schneider VFD	Rango de ancho de la Viga	7.9 ~16.2 in / 200 ~ 410 mm
Freno Dinámico	Included	Accesorios	Overload Protection, Siren, Beacon
Control	Pendant Control and Remote Control Telecontrol F24-6D	Normas	ASME HST-4 , ASME B30.16 , B30.17 , EN14492-2 , EN60204-32
Voltaje del Control	48V	Garantía	3 Year

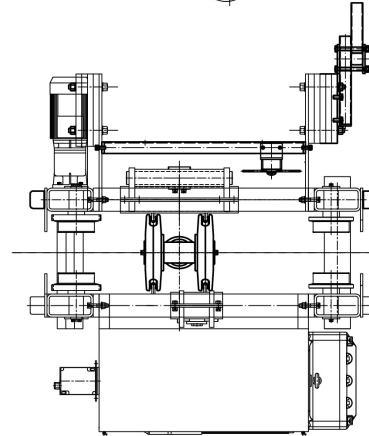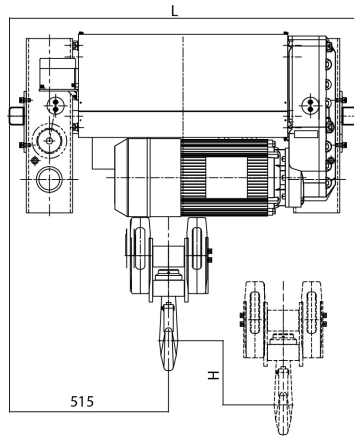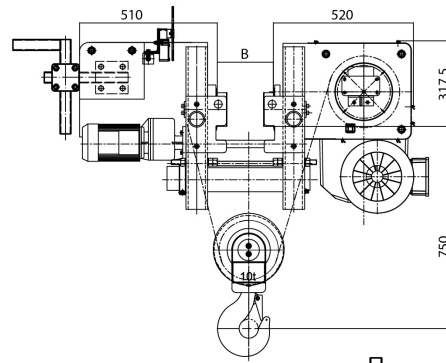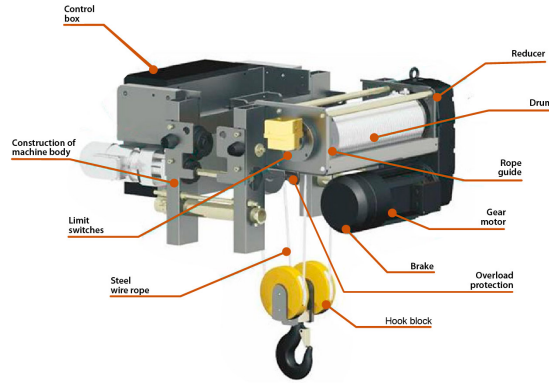

DRIVE TECHNOLOGY

SEW Eurodrive high performance Motor, reducer and brake. Compact design, light weight, low energy consumption, low noise and eco-friendly design. Electromagnetic brake disc (Asbestos-free). Long Service life and easy maintenance.



OVERLOAD PROTECTION

Load Cell connected to a Limit Relay (Adjustable) to avoid overloading of the hoist.



WIRE ROPE GUIDE

Helps the winding of the rope on the drum. Light weight and highly resistance. Design to reduce friction on the wire rope and avoid premature wear.



HIGH-PERFORMANCE WIRE ROPES

High-performance wire rope with tensile strength up to 2160Mpa. Galvanized surface and high flexibility to ensure long service life.




DRUM

Q345 steel, seamless grooved drum. Design to fulfill FEM and ASME standards and ensure a safe operation.



LIMIT SWITCHES

High precision adjustable height limit switches, for all movements of hoist and trolley.



LIFTING HOOK GROUP

DIN standard lifting hook with safety clasp. Forged by the high-strength material of T grade.



CONTROL BOX

Electric Control box with Schneider Inverter, Eaton contactors and components. Compact design, easy access, IP65 Enclosure.

Peso & Dimensiones

Detalles del Empaque

Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso